



Tamper Evident Carton Sealer / Labeler CVC 230



The CVC 230 is a carton sealing labeler featuring CVC exclusive selfset™ control system provides wrinkle-free labeling for top product labeling. The touch screen panel display shows all automatic settings.

All CVC labelers include our SelfSet™ software which utilizes a high frequency encoder for extremely easy setup and wrinkle free labeling at the touch of a button.

STANDARD FEATURES

- SelfSet™ Auto Adjusting Control System
- Stepper Motor (or Servo Motor) Driven Head Labeling
- Touch Screen HMI
- Label Head with up to ± 1 mm ($1/32$ ") Accuracy (*Bottles/ Containers Dependent)
- Label Sensor for Paper or Opaque Labels
- Stainless Steel Frame on Lockable Casters
- Stainless Steel Flatbed Conveyor, 6" Wide Endless Green Belt



CVC 230 Technical Specifications

Type	U1A / U1AW
Productivity	Up to 180 PPM (subject to trial confirmation) Dispense Speed: 30 M/min (98 ft/min)
Applicable Size	Label: Length & Width: 16-30 mm ($5/8$ " to $1\frac{1}{4}$ ") Optional: 10-15 mm ($3/8$ " to $1/2$ ") Carton: Length: (depend on conveyor type) U1A: 75-120 mm (3 " to $4\frac{3}{4}$ ") U1AW: 105-200 mm ($4\frac{1}{4}$ " to 8 ") Width: 20-100 mm ($3/4$ " to 4 ") Height: 10-100 mm ($1/2$ " to 4 ")
Power Source	110/220 V, 50/60 HZ, 1 PH
Power Consumption	484 VA (110V: 4.4 A, 220V: 2.2 A)
Air Pressure	6 bar (87 psi)
Air Consumption	50 NL/min (1.8 CFM) (for optional Lot/Date printer)
Machine Dimensions (L x W x H)	1,815 x 1,025 x 1,580-1,670 mm (5'-11" x 3'-4" x 5'-2" to 5'-6")
Machine Weight	270 kg (595 lbs)
Noise Level	≤ 75 dB

Technical data contained in this material are not binding and may be subject to change without prior notice.

TECHNICAL SPECIFICATIONS

AVAILABLE OPTIONS

- C60/ C70 Hot Stamp (Lot/Date Coding)
- Missing Hot Stamp Imprint Check
- Integrated Thermal Printer (Lot/Date, Bar Code and Graphics)
- Dataflex or Similar Lot/Date Code Printer
- Clear, Metallic or Color Label Sensor
- End to end Transfer Plates
- Infeed and outfeed Conveyor Extensions
- Separator Wheel for Controlled Spacing




THERMAL TRANSFER PRINTER




MACHINE LAYOUTS

Top View

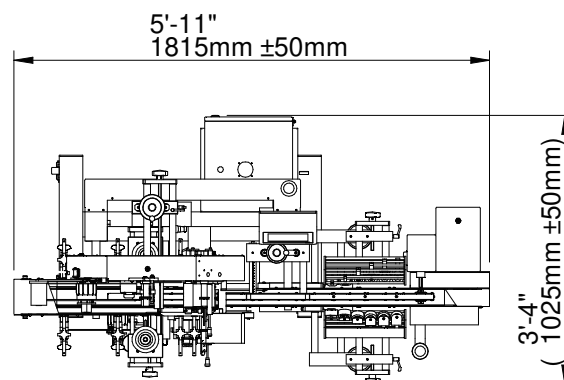

Front View

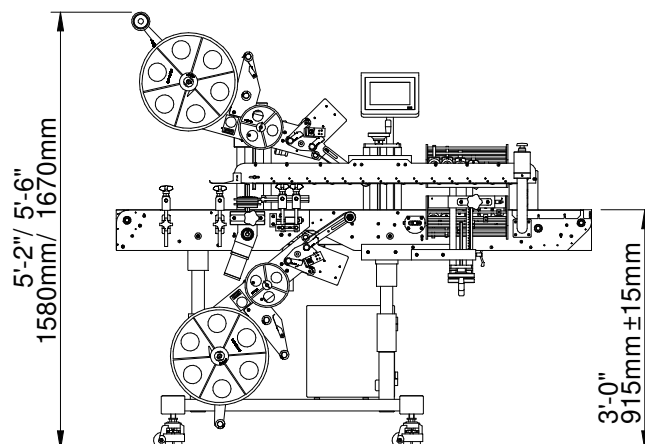

Technical data contained in this material are not binding and may be subject to change without prior notice.



Contact Us

USA

10861 Business Drive, Fontana, CA 92337
Phone: +1 (909) 355-0311
www.cvcusa.com ; www.cvctechnologies.com
sales@cvcusa.com

Taiwan-Asia Pacific Headquarters

Phone: +886 (4) 2496-3666
sales@cvctechnologies.com

India

Phone: +91 (22) 2562-1242, +91 (22) 2562-1243
sales@cvctechnologies.com

China

Phone: +86 (512) 8363-6368
sales@cvctechnologies.com