


Eiahe

systems


沧州怡和机械有限公司 Cangzhou Eiahe Packing Machinery Co.,Ltd.

www.eiahe.com

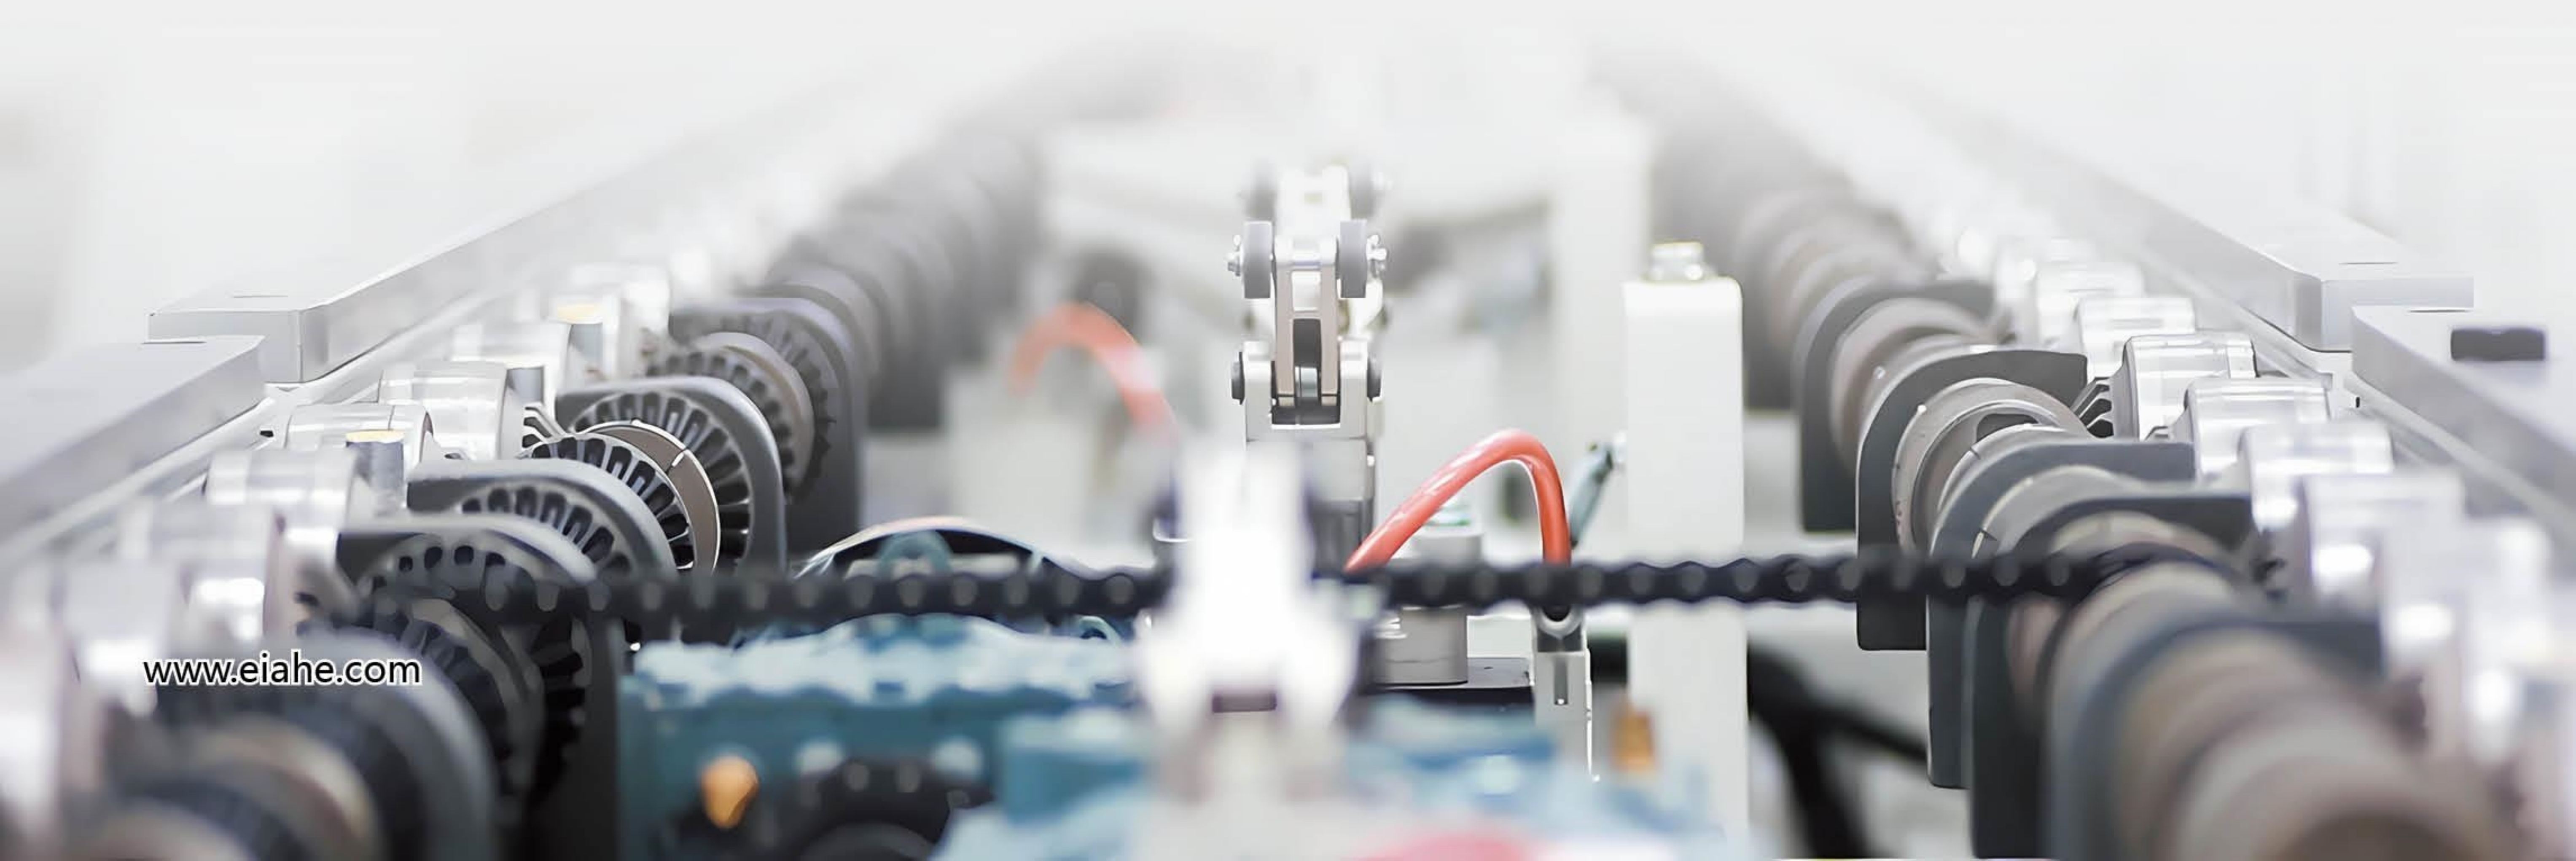

P-220S

P 系列 – 预制袋水平式包装机
Pre-made Pouch Horizontal Packaging Machine

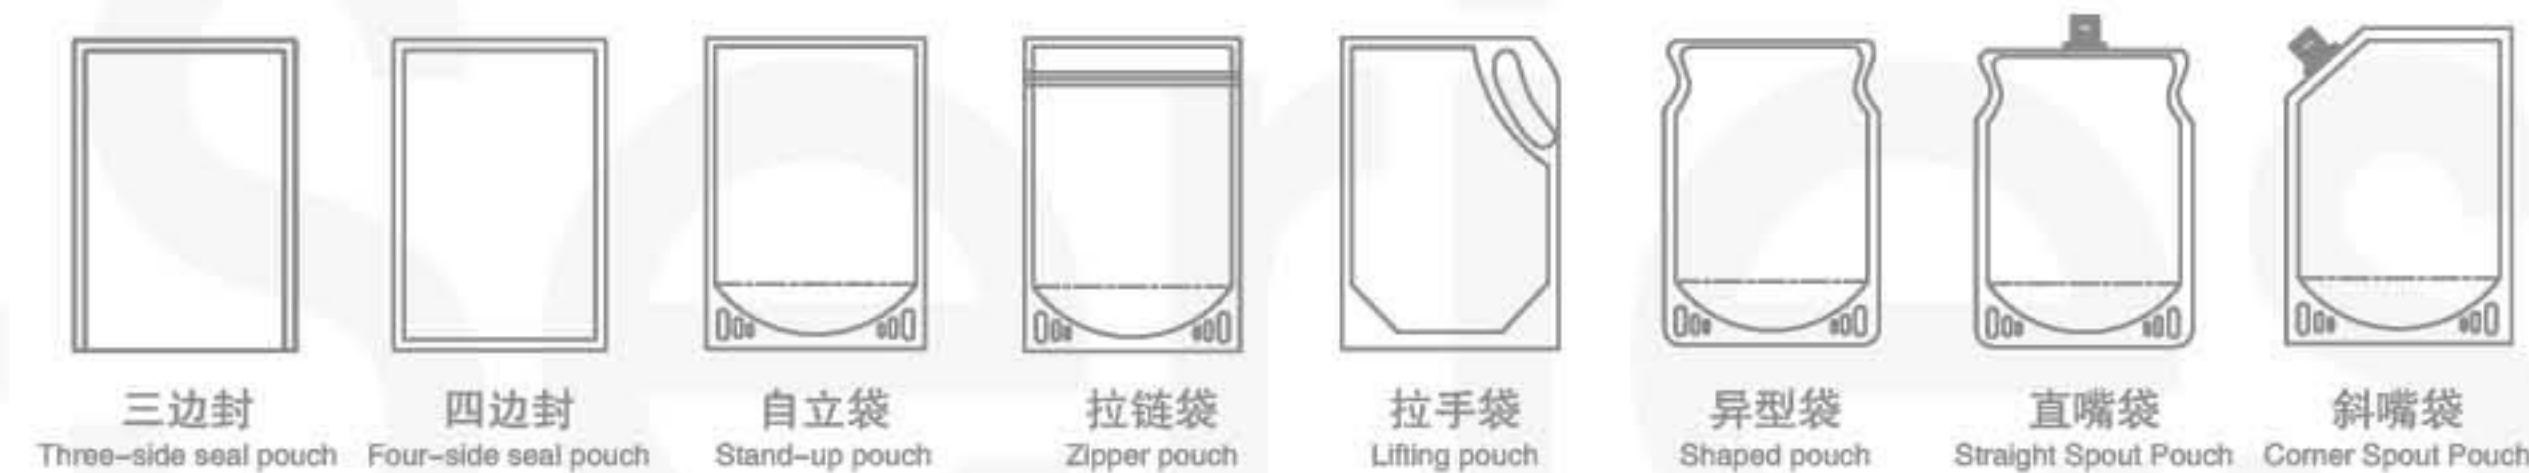



Eiahe
systems

技术参数 Technical Parameters

袋子尺寸 (宽 × 高 × 底)	Size of Pouch (WxHxB)	Min.85 × 140 × (25 × 2)mm Max.205 × 300 × (50 × 2)mm
袋子形状	Shape of Pouch	三边封、四边封、直立袋、异型袋等 Three-side pouch, four-side pouch, stand-up pouch, shaped pouch
速度范围	Speed Range	40-70p.p.m.(袋 / 分钟)
电压	Power Supply	AC380V
功率	Power Consumption	7.5kW
耗气量	Air Consumption	0.6-1.5m ³ /min
噪音指数	Noise Level	<80dB
净重	Net Weight	3700kg
设备尺寸 (长 × 宽 × 高)	Machine Dimension(LxWxH)	3460 × 2085 × 1470mm

P-330

P 系列 – 预制袋水平式包装机
Pre-made Pouch Horizontal Packaging Machine

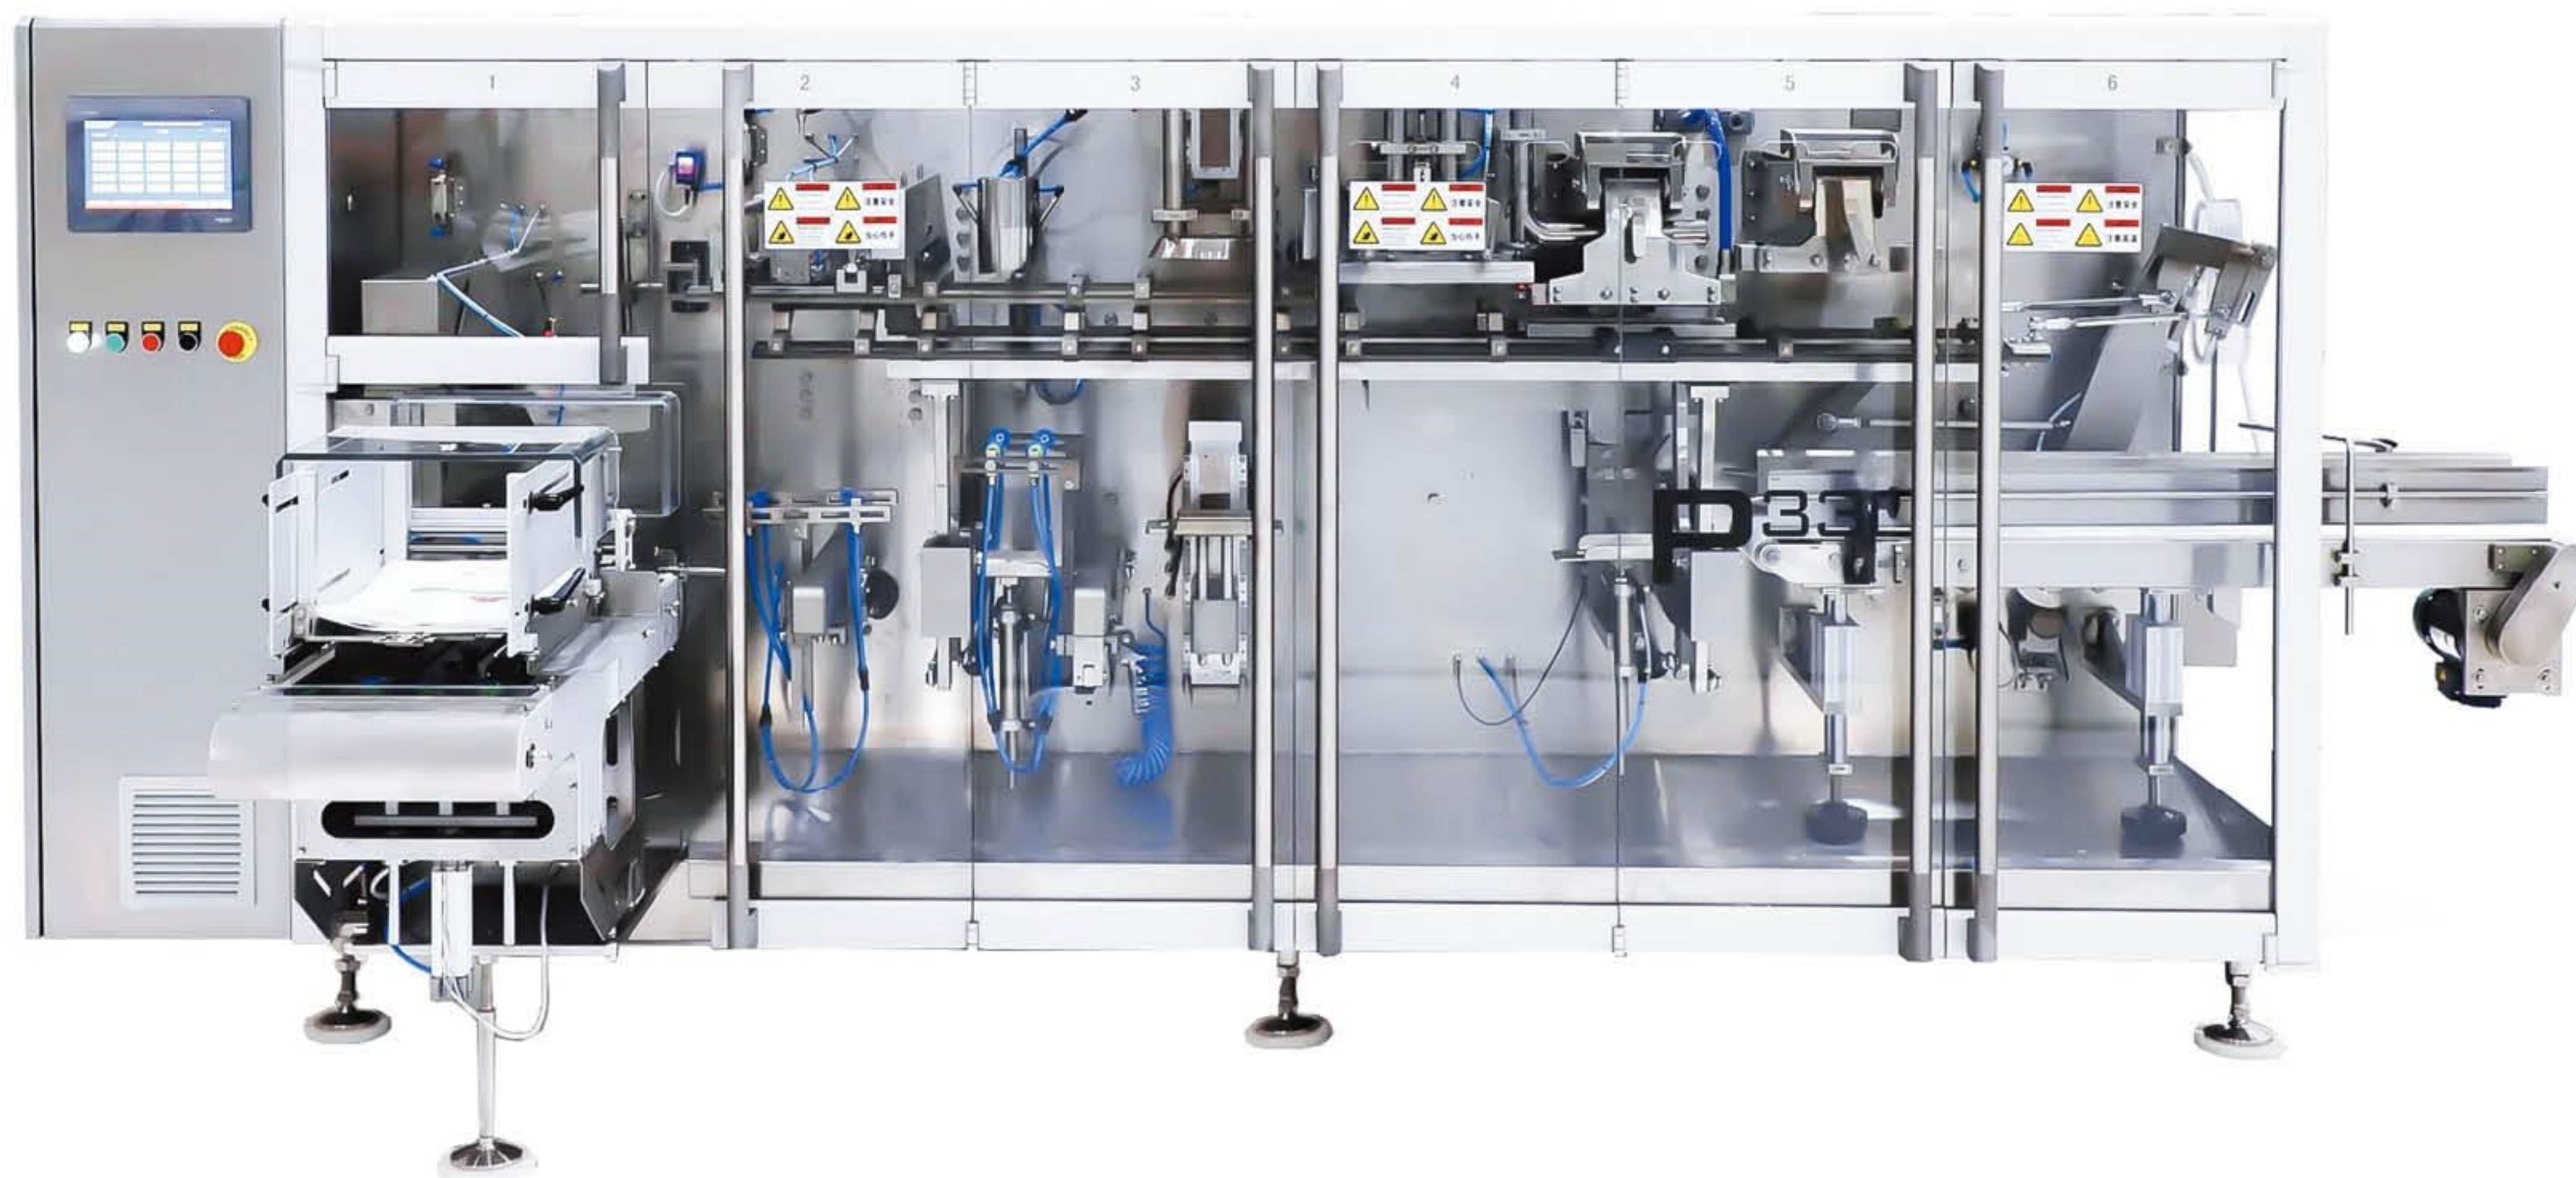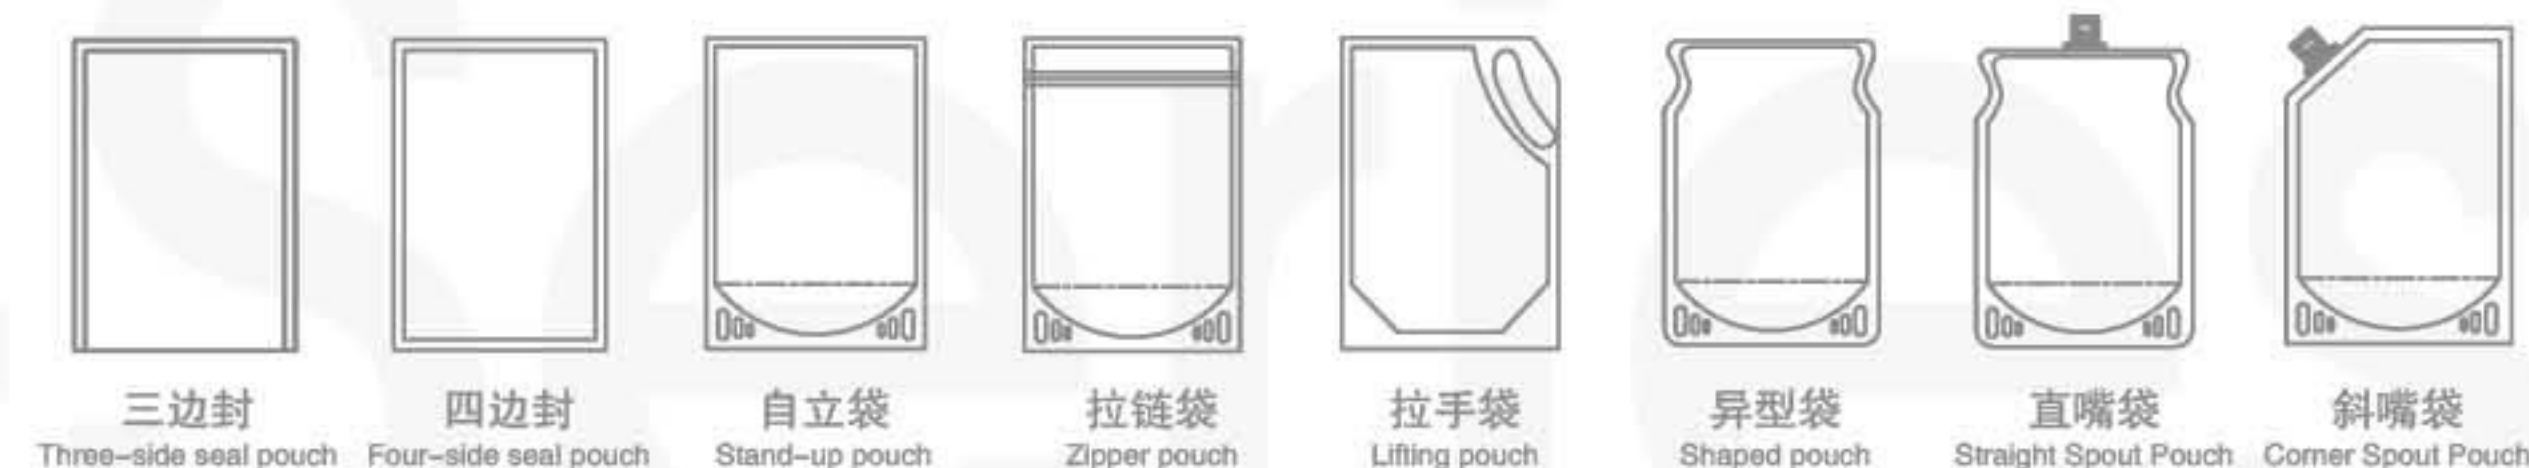



Eiahe
systems

技术参数 Technical Parameters

袋子尺寸 (宽 × 高 × 底)	Size of Pouch (WxHxB)	Min.150 × 200 × (25 × 2)mm Max.315 × 450 × (60 × 2)mm
袋子形状	Shape of Pouch	三边封、四边封、直立袋、异型袋等 Three-side pouch, four-side pouch, stand-up pouch, shaped pouch
速度范围	Speed Range	20-40p.p.m.(袋 / 分钟)
电压	Power Supply	AC380V
功率	Power Consumption	3.5kW
耗气量	Air Consumption	0.6-1.5m ³ /min
噪音指数	Noise Level	<80dB
净重	Net Weight	4200kg
设备尺寸 (长 × 宽 × 高)	Machine Dimension(LxWxH)	3890 × 2230 × 1560mm

P-330S

P 系列 – 预制袋水平式包装机
Pre-made Pouch Horizontal Packaging Machine

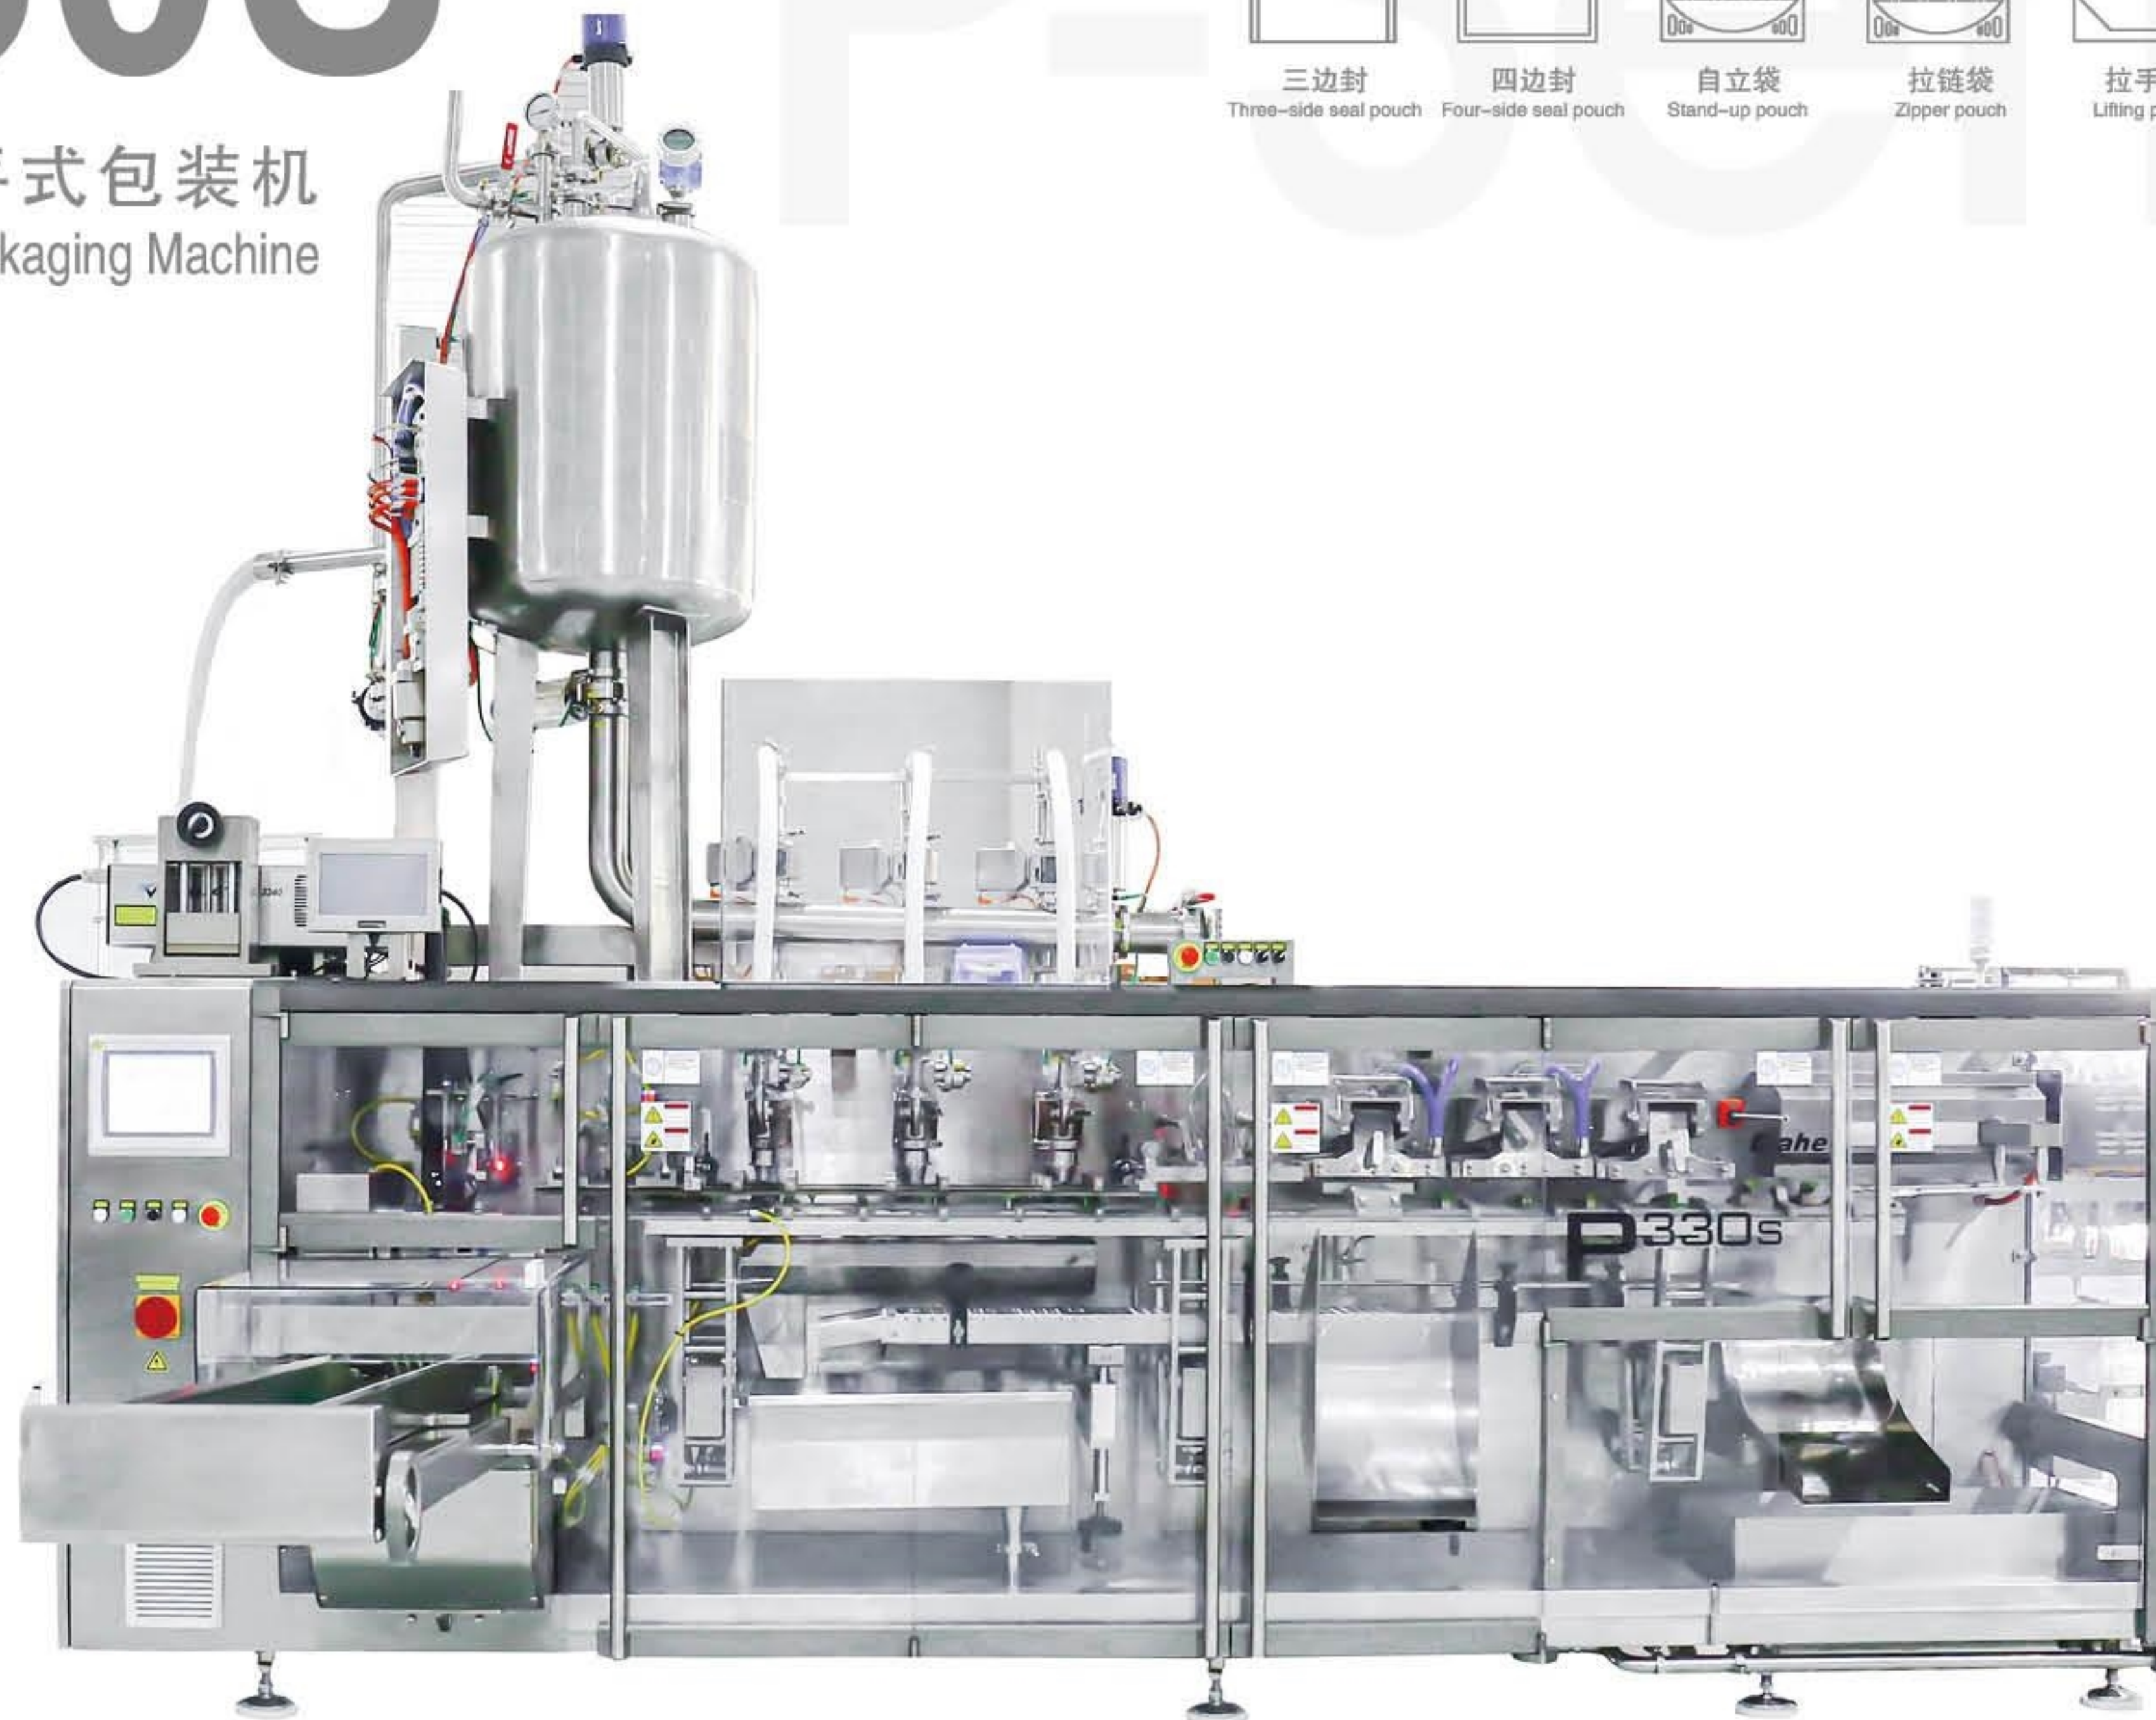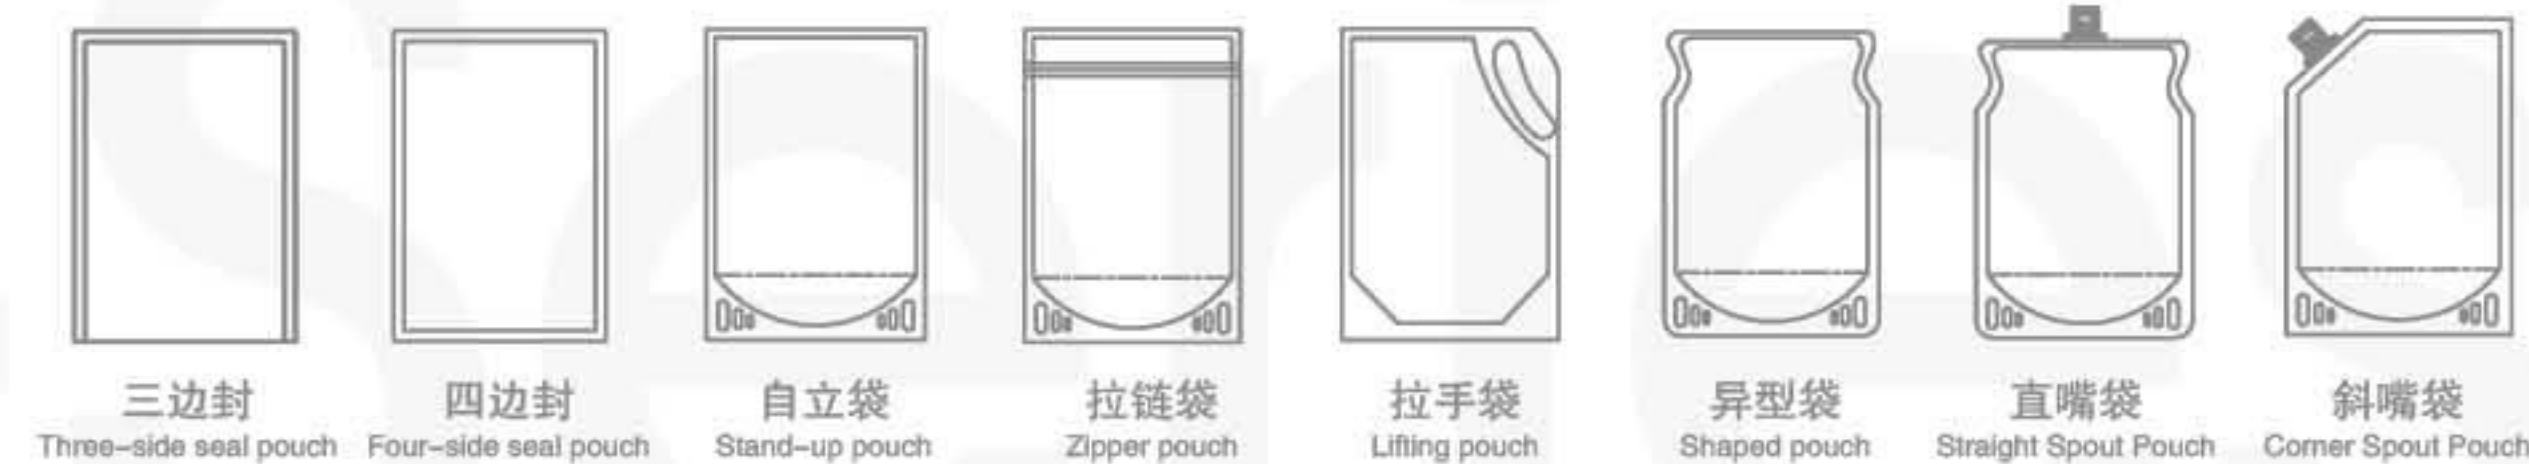


Eiahe
systems

技术参数 Technical Parameters

袋子尺寸 (宽 × 高 × 底)	Size of Pouch (WxHxB)	Min.150 × 200 × (25 × 2)mm Max.315 × 450 × (60 × 2)mm
袋子形状	Shape of Pouch	三边封、四边封、直立袋、异型袋等 Three-side pouch, four-side pouch, stand-up pouch, shaped pouch
速度范围	Speed Range	20-55p.p.m.(袋 / 分钟)
电压	Power Supply	AC380V
功率	Power Consumption	7.5kW
耗气量	Air Consumption	0.6-1.5m ³ /min
噪音指数	Noise Level	<80dB
净重	Net Weight	4500kg
设备尺寸 (长 × 宽 × 高)	Machine Dimension(LxWxH)	4785 × 3241 × 1560mm

P-460SD

P 系列 – 预制袋水平式包装机
Pre-made Pouch Horizontal Packaging Machine

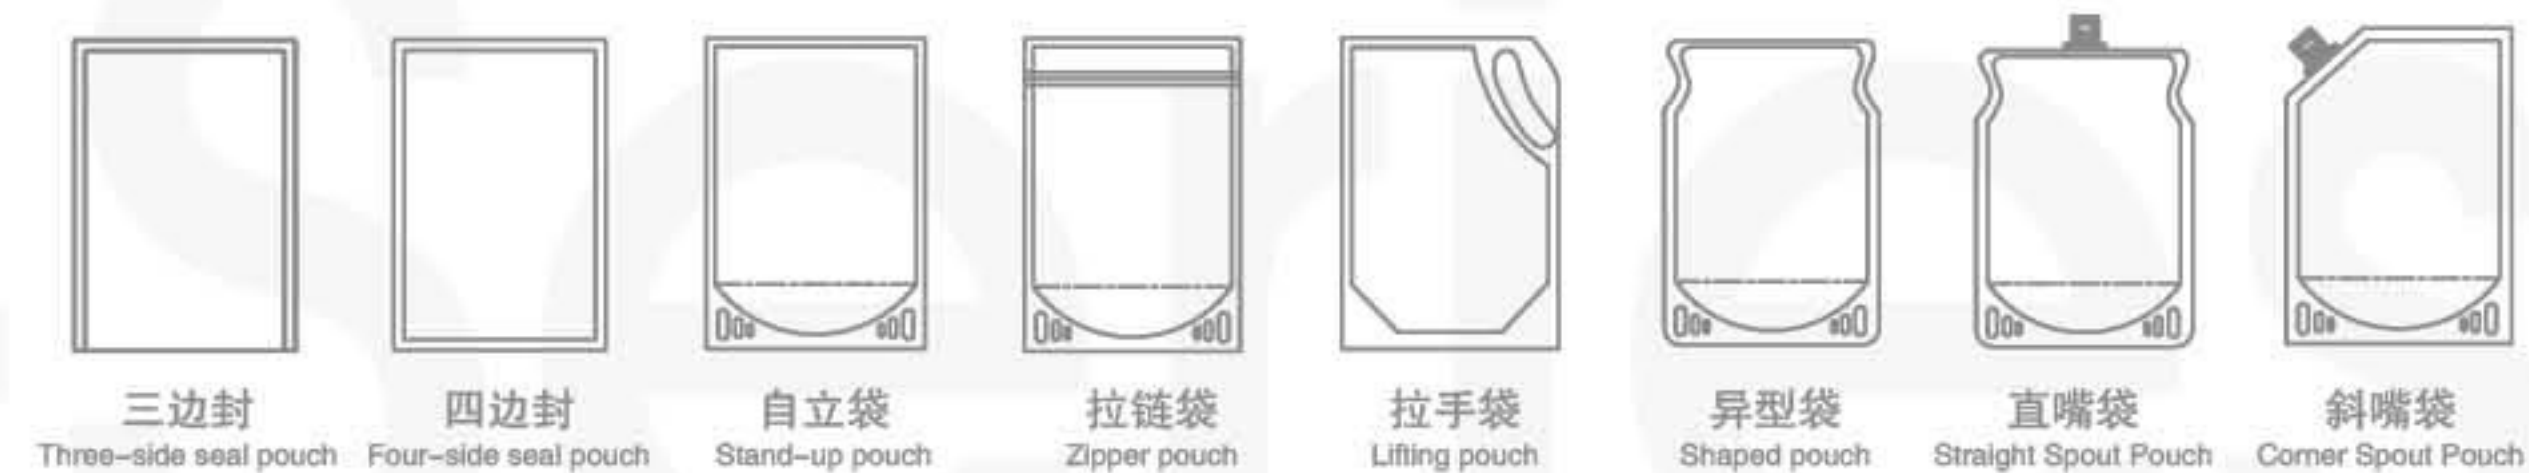


Eiahe
systems

技术参数 Technical Parameters

袋子尺寸 (宽 × 高 × 底)	Size of Pouch (WxHxB)	Min.100 × 140 × (25 × 2)mm Max.200 × 330 × (50 × 2)mm
袋子形状	Shape of Pouch	三边封、四边封、直立袋、异型袋等 Three-side pouch, four-side pouch, stand-up pouch, shaped pouch
速度范围	Speed Range	40-80p.p.m.(袋 / 分钟)
电压	Power Supply	AC380V
功率	Power Consumption	9.5kW
耗气量	Air Consumption	0.6-1.5m ³ /min
噪音指数	Noise Level	<80dB
净重	Net Weight	5500kg
设备尺寸 (长 × 宽 × 高)	Machine Dimension(LxWxH)	5550 × 3095 × 1560mm

HS-280D

S 系列 - 全自动卷膜水平式包装机
Horizontal Form-Fill-Seal Packaging Machine

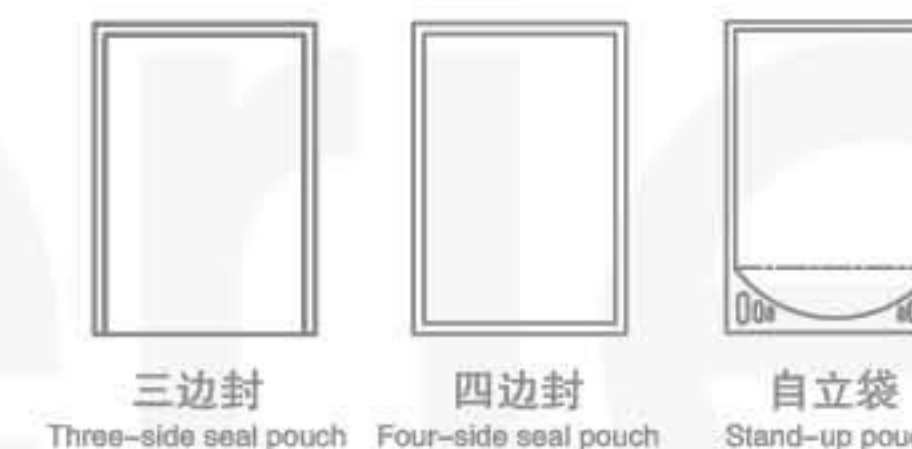


Eiahe
systems

技术参数 Technical Parameters

袋子尺寸 (宽 × 高 × 底)	Size of Pouch (WxHxB)	Min.80 × 140mm Max.130 × 220mm
袋子形状	Shape of Pouch	三边封、四边封、直立袋 Three-side pouch, four-side pouch, stand-up pouch
速度范围	Speed Range	80-160p.m.(袋 / 分钟)
电压	Power Supply	AC380V
功率	Power Consumption	11kW
耗气量	Air Consumption	0.6-1.5m ³ /min
噪音指数	Noise Level	<80dB
净重	Net Weight	7000kg
设备尺寸 (长 × 宽 × 高)	Machine Dimension(LxWxH)	7010 × 1300 × 2070mm

S-220

S 系列 - 全自动卷膜水平式包装机
Horizontal Form-Fill-Seal Packaging Machine

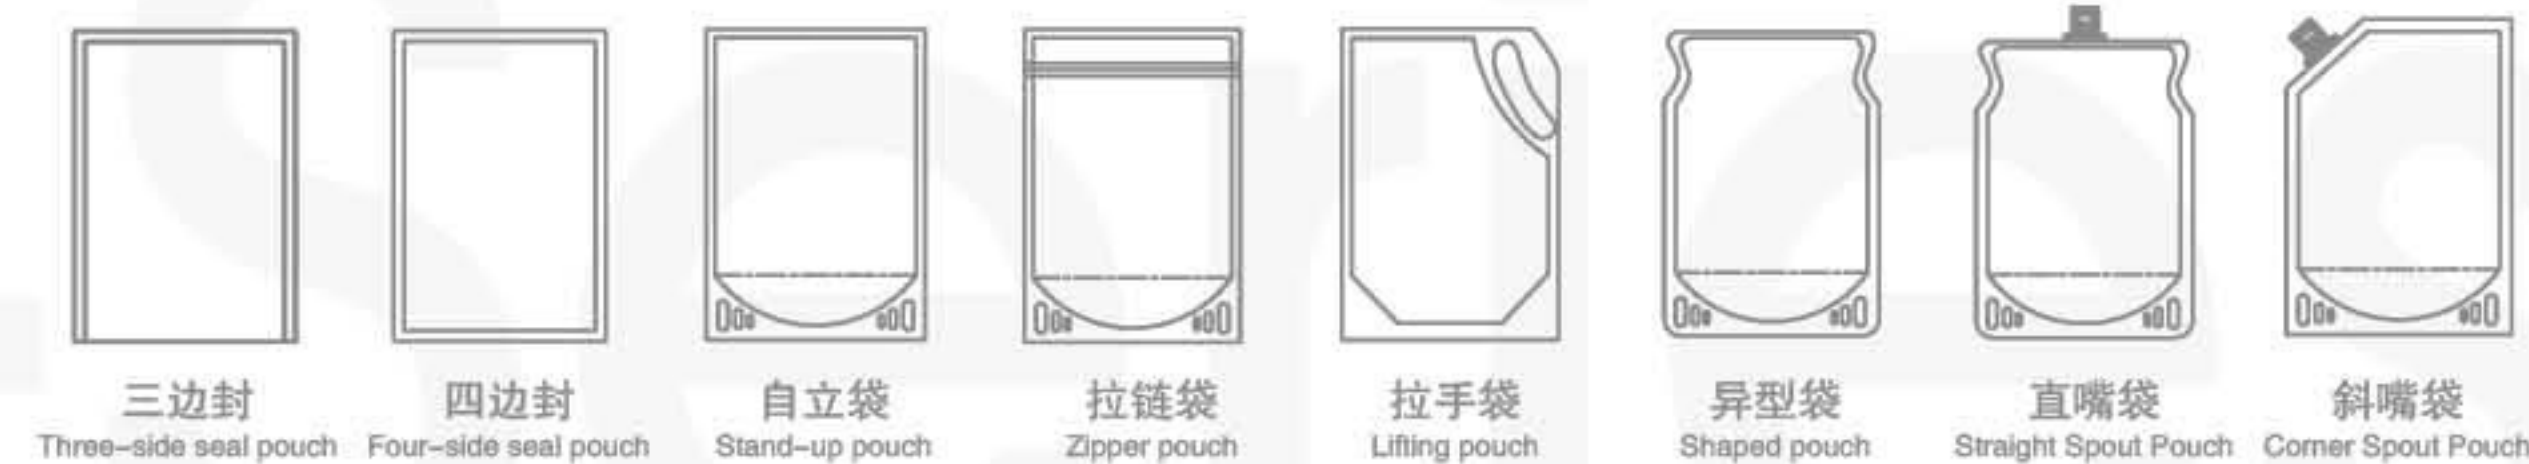


Eiahe
systems

技术参数 Technical Parameters

袋子尺寸 (宽 × 高 × 底)	Size of Pouch (WxHxB)	Min.90 × 140 × (25 × 2)mm Max.200 × 280 × (50 × 2)mm
袋子形状	Shape of Pouch	三边封、四边封、直立袋、异型袋等 Three-side pouch, four-side pouch, stand-up pouch, shaped pouch
速度范围	Speed Range	40-70p.p.m.(袋 / 分钟)
电压	Power Supply	AC380V
功率	Power Consumption	9.5kW
耗气量	Air Consumption	0.6-1.5m ³ /min
噪音指数	Noise Level	<80dB
净重	Net Weight	7800kg
设备尺寸 (长 × 宽 × 高)	Machine Dimension(LxWxH)	7760 × 1450 × 1945mm

S-330DC

S 系列 - 全自动卷膜水平式包装机
Horizontal Form-Fill-Seal Packaging Machine

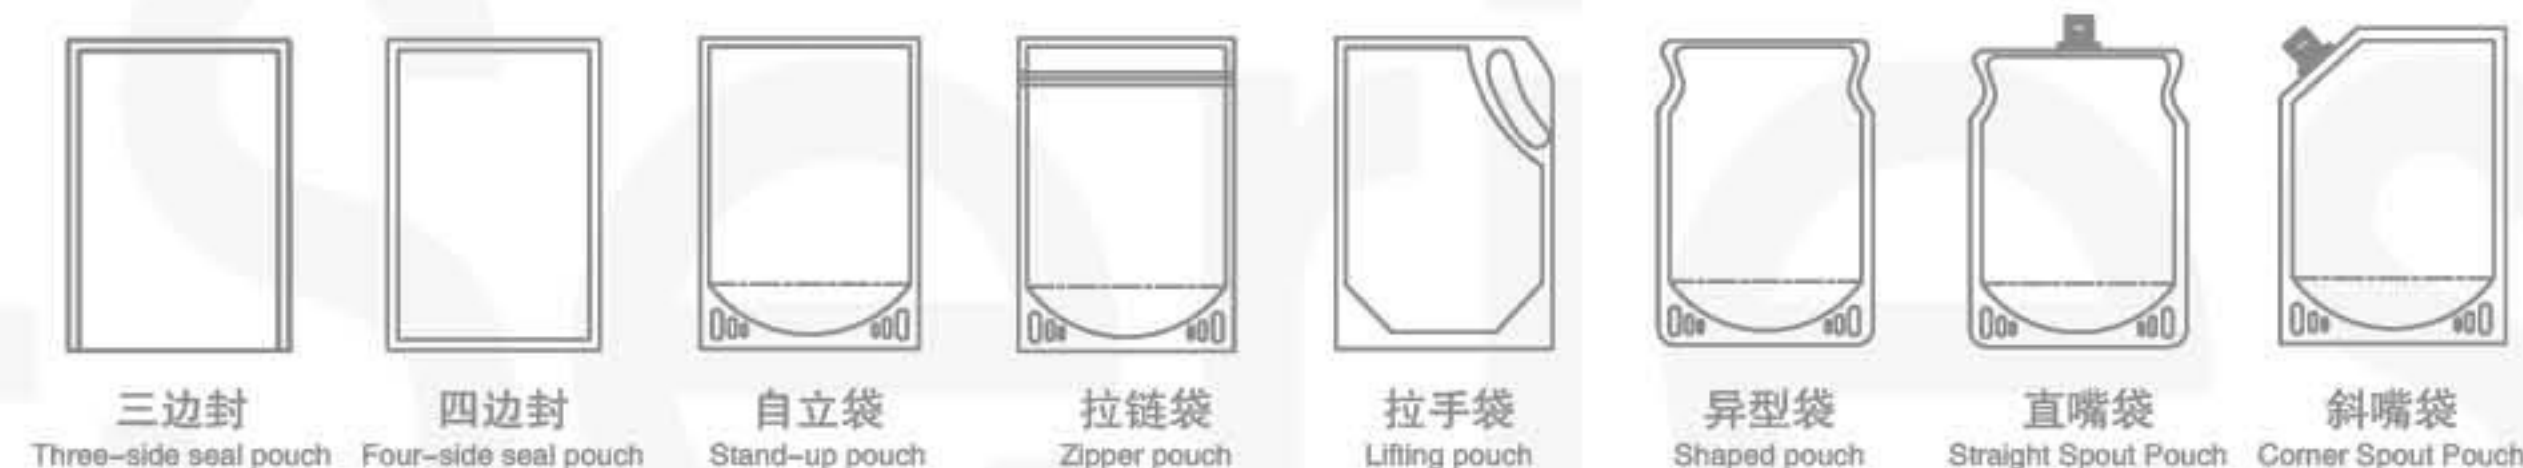


Eiahe
systems

技术参数 Technical Parameters

袋子尺寸 (宽 × 高 × 底)	Size of Pouch (WxHxB)	Min.90 × 140 × (25 × 2)mm	Max.160 × 280 × (50 × 2)mm
袋子形状	Shape of Pouch	三边封、四边封、直立袋、异型袋等 Three-side pouch, four-side pouch, stand-up pouch, shaped pouch	
速度范围	Speed Range	80-100p.m.(袋/分钟)	
电压	Power Supply	AC380V	
功率	Power Consumption	13.5kW	
耗气量	Air Consumption	0.6-1.5m ³ /min	
噪音指数	Noise Level	<80dB	
净重	Net Weight	8700kg	
设备尺寸 (长 × 宽 × 高)	Machine Dimension(LxWxH)	9300 × 1450 × 1945mm	

S-460D

S 系列 - 全自动卷膜水平式包装机
Horizontal Form-Fill-Seal Packaging Machine

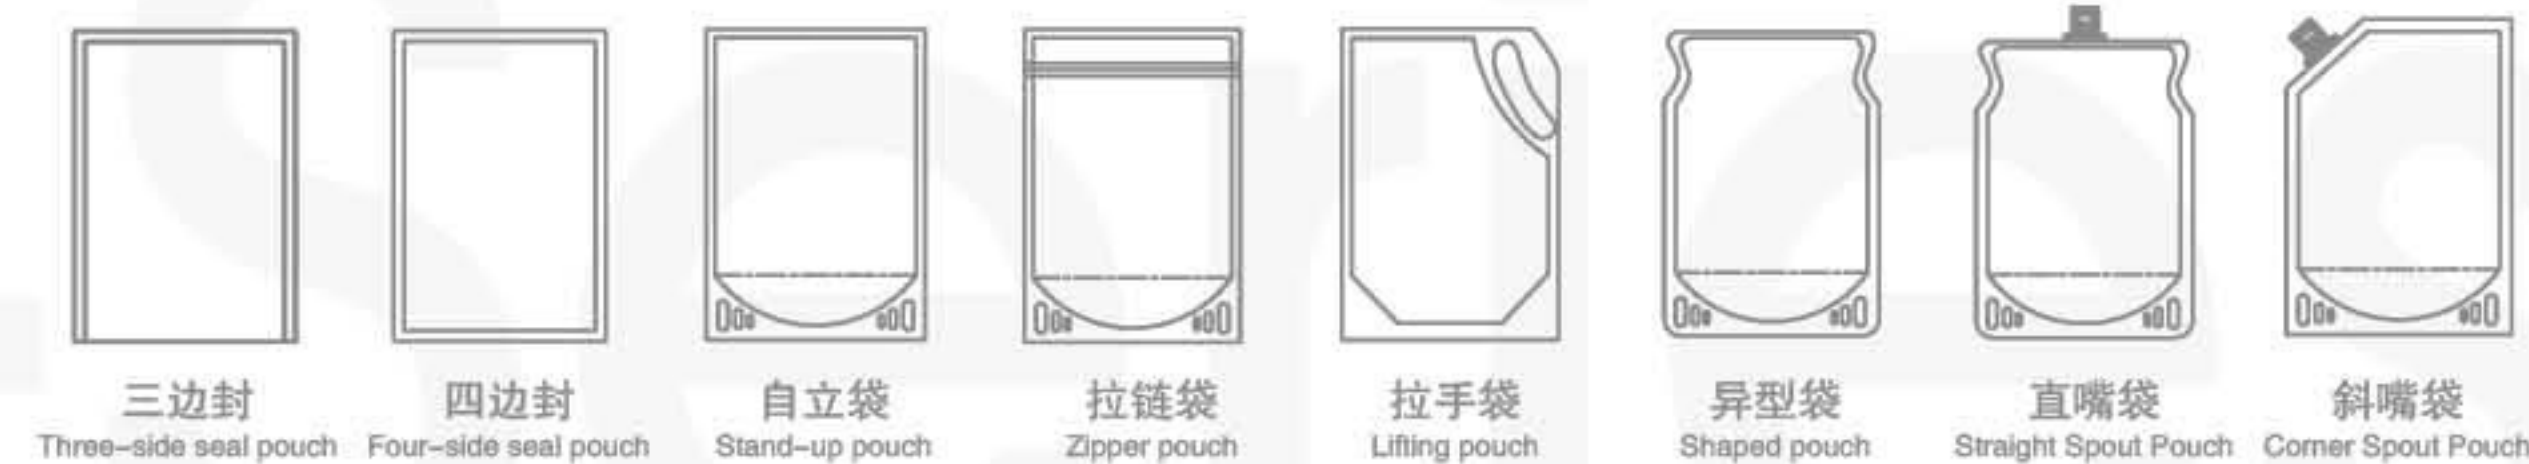

Eiahe
systems

技术参数 Technical Parameters

袋子尺寸 (宽 × 高 × 底)	Size of Pouch (WxHxB)	Min.100 × 140 × (25 × 2)mm Max.220 × 330 × (60 × 2)mm
袋子形状	Shape of Pouch	三边封、四边封、直立袋、异型袋等 Three-side pouch, four-side pouch, stand-up pouch, shaped pouch
速度范围	Speed Range	60-100p.m.(袋 / 分钟)
电压	Power Supply	AC380V
功率	Power Consumption	16.5kW
耗气量	Air Consumption	0.6-1.5m ³ /min
噪音指数	Noise Level	<80dB
净重	Net Weight	10500kg
设备尺寸 (长 × 宽 × 高)	Machine Dimension(LxWxH)	10850 × 1500 × 1945mm