


HORIZONTAL AMPULE LABELER

CVC 350.U2





- SelfSet[™] Auto Adjusting Control System
- · Servo Motor Driven Head Labeling
- · Touch Screen HMI
- Label Head with up to ± 1 mm (1/32") Accuracy (*Bottles/ Containers Dependent)
- · Label Sensor for Paper or Opaque Labels
- Product Sensor with Opaque and Clear Bottle Mode
- · Stainless Steel Frame on Lockable Casters
- Stainless Steel 25-Degree Conveyor with 5-5/8" Wide Roller Chain





		0.60 -0
CAC SEU	Tachnical S	nacifications
しいしつむし	Teciliical 3	pecifications

	•
Type	U2
Productivity	Up to 250 BPM (subject to trial confirmation) Labeling Speed: 38 M/min (124 ft/min)
Applicable Size	Label: Length: 15-75 mm (1/2" to 3") Width: (depend on label head type) A: 15-39 mm (1/2" to 1 1/2") B: 15-96 mm (1/2" to 3 3/4") Bottle: Dia.: Ø10-24mm (3/8" to 1") (depend on conveyor width) Height: Type A: 40-70 mm (1 1/2" to 2 3/4") Type B: 40-120mm (1 1/2" to 4 3/4")
Power Source	110/220 V, 50/60 HZ, 1 PH
Power Consumption Air Pressure	748 VA (110V: 6.8 A, 220V: 3.4 A) 6 bar (87 psi)
Air Consumption	50 NL/min (1.8 CFM) (for optional Lot/Date printer)
Machine Dimensions (L x W x H)	1,931 x 840 x 1,738 mm [6'-4" x 2'-9.1" x 5'-8.4"]
Machine Weight	230 kg (507 lbs)
Noise Level	≤ 75 dB

Technical data contained in this material are not binding and may be subject to change without prior notice.

TECHNICAL SPECIFICATIONS


AVAILABLE OPTIONS

- · Vertical Bottle Loading System
- · C60 Hot Stamp Printer
- · Clear Label Sensor
- · Missing Imprint Inspection
- · Missing Label on Bottle Inspection
- · Bottle Loading Device
- · Bottle Reject System
- · Bottle Reject Verification Check
- · 3-color Tower Lamp
- · Vertical Bottle Accumulation System
- · Bottle Backlogged Sensor




MACHINE LAYOUTS

Top View



Front View

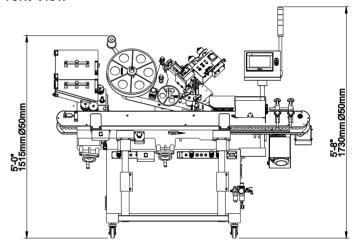

Technical data contained in this material are not binding and may be subject to change without prior notice.





Contact Us

USA

10861 Business Drive, Fontana, CA 92337 Phone: +1 (909) 355-0311 www.cvcusa.com; www.cvctechnologies.com sales@cvcusa.com

Taiwan-Asia Pacific Headquarters

Phone: +886 (4) 2496-3666 sales@cvctechnologies.com

India

Phone: +91 (22) 2562-1242, +91 (22) 2562-1243 sales@cvctechnologies.com

China

Phone: +86 (512) 8363-6368 sales@cvctechnologies.com